

# PVC Suction Hose :-


## PVC Heavy Duty Suction Hose (Water) :

Size (mm)	D1 (mm)	D2 (mm)	Thickness (mm)	D (mm)	P (mm)	Length/Roll (meter)	Working Pressure
19mm 3/4	19.0±0.5	23.4 ±0.5	2.2±0.2	2.0	5.0	30	10
25 (1")	25.4±0.5	30.0 ±0.5	2.3±0.2	2.0	5.0	30	10kg
30 (1 1/4")	31.7±0.5	36.7±0.5	2.5±0.2	2.5	6.5	30	8
40 (1 1/2")	38.1±0.5	44.0±0.5	2.9±0.3	3.0	6.0	30	6
45 (1 3/4")	44.5±0.5	50.3±0.5	3.0±0.3	3.0	6.5	30	6
50 (2")	50.8±0.75	56.8±0.75	3.0±0.3	3.2	6.5	30	6
65 (2 1/2")	63.6±1.0	69.5±1.0	3.0±0.4	3.5	7.5	30	5
75 (3")	76.2±1.0	83.0±1.0	3.4±0.5	4.0	8.0	30	5
100 (4")	101.6±1.5	119.0±1.5	4.5±0.75	5.0	9.0	30	4
5" 125	127±1.5	137±1.5	5±0.5	5.5	9.0	30	3
8" 150	152±1.5	163±1.5	5.5±0.5	6.0	10.0	15	3
8" 200	203±1.5	219±1.5	8±0.5	7.0	11.0	6	3

## Application :

- Heavy duty suction application industry.
- Suction of saline water, light acids, sewage, alkaline and other chemicals excepting solvents.
- Suction for dung cart
- Civil engineering and subway mining construction
- Fisheries and shipping industries
- Conveying of granules or fine particles of raw material in processing industries.

**Tuffline**<sup>TM</sup>®

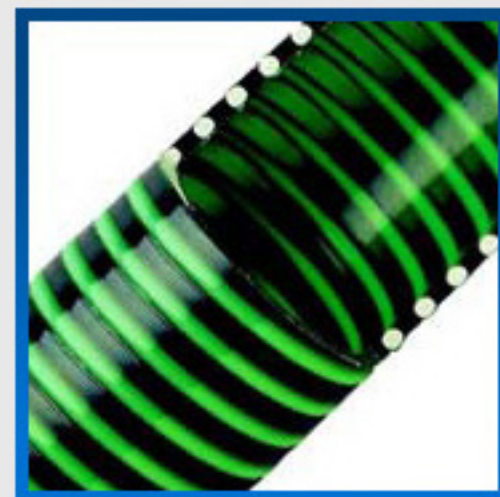

Recommended Maximum Working Temperature: 60/65° C.

Variation in ID/OD

[\* = +/- 0.5] [\*\* = +/- 1.0] [\*\*\* = +/- 1.5] [\*\*\*\* = +/- 2.0]